



## Product Data

Product Code	ARX-517
Type	Slimline surface grazing light
Construction	CNC machined brass
Warranty	10 Years

## Electrical Data

Input Voltage	24VDC
Nominal Power	2W
Dimming	Yes, 2-Wire direct dimming.
Wiring	Parallel

## Mechanical & Thermal Data

Overall Dimensions	180mm x 35mm x 18mm
Weight	0.310 kg
Max Ambient Temperature	40°C
IP Rating	IP65

## Photometric Data (Narrow Medium optic)

CCT	2200K	2700K	3000K	4000K
Rated Flux (lm delivered)	-	124	131	140
Efficacy (lm/W)	-	59	62	66
CRI (Ra)	-	90+	90+	90+

## Optical Data (3000K)

Description	Diffuse
Nominal FWHM	86
Peak Intensity (cd/lm)	71
UGR	-

## Lifetime & Compliance Data

L70 / B10	50,000h
EMI	Compliant
RCM	Approved
Mercury Content	0mg

## Introduction

PIA SLIM is a low profile linear grazing light suitable for stair risers and other way finding applications. With an innovative bracket that houses the light source, PIA SLIM is easy to install low to the ground.

Integrated 24V PWM 2-wire light sources are achieved via the development of custom COB modules, all feature 90+ CRI and chemically etched glass for perfectly diffuse light output.

Crafted from solid brass, the ARX range is 100% Australian made in Sydney.

Full IES files, LM-80 and compliance data is available from [arx.lighting](http://arx.lighting).

## PRELIMINARY DATASHEET



Years  
Warranty



Ingress  
Protection



Solvent  
Resistant



Saltwater  
Resistant




Observe  
Polarity




Lumen  
Maintenance

Natural Brass, Waxed

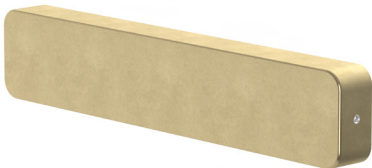

Carbonite Aged, Waxed

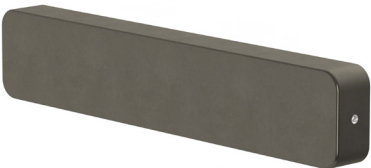

Dimensions

