

LENA / ARX-535 Compact, shallow uplight





Product Data					
Product Code	ARX-535				
Туре	Compact, shallow uplight				
Construction	CNC machined brass				
Warranty	10 Years				
Electrical Data					
Input Voltage	24VDC				
Nominal Power	4W				
Dimming	Yes. 3-Wire PWM Signal dimming.				
Wiring	Parallel				
Mechanical & Thermal Data					
Overall Dimensions	60mm x 48mm				
Weight	0.505 kg				
Max Ambient Temperature	40°C				
IP Rating	IP65				
Photometric Data (Narrow Medi	ium optic)				
CCT	2700K		3000K	4000K	
Rated Flux (Im delivered)	288		303	324	
Efficacy (Im/W)	85 8		9 95		
CRI (Ra)	90+		90+	90+	
Optical Data (3000K)					
Description	Spot	Narrow Medium	Wide	Full Flood	ASYM
Nominal FWHM	16	27	48	75	-
Peak Intensity (cd/lm)	2989	1001	405	234	-
UGR	-	-	-	-	-
Lifetime & Compliance Data					
L70 / B10	50,000h				
EMI	Compliant				
RCM	Approved				
Mercury Content	0mg				

PRELIMINARY DATASHEET

arx.lighting has full product details and all available options, order code configuration & customised datasheets.

Introduction

LENA is a compact, shallow uplight with both symmetrical and wall wash optical options.

Crafted from solid brass, the ARX range is 100% Australian made in Sydney.

Full IES files, LM-80 and compliance data is available from <u>arx.lighting.</u>



Lumen Maintenance

LM80



LENA / ARX-535


Dimensions and finish options

Natural Brass, Waxed

Carbonite Aged, Waxed



Dimensions

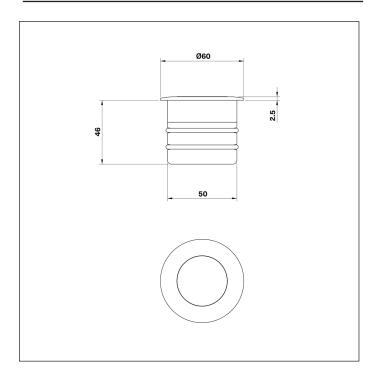

arx.lighting has full product details and all available options, order code configuration & customised datasheets.