

**Product Data**

Product Code	ARX-537
Type	Compact, low-glare recessed uplight
Construction	CNC machined brass
Warranty	10 Years

**Electrical Data**

Input Voltage	24VDC
Nominal Power	4W
Dimming	Yes. 3-Wire PWM Signal dimming.
Wiring	Parallel

**Mechanical & Thermal Data**

Overall Dimensions	54mm x 75mm
Weight	0.5 kg
Max Ambient Temperature	40°C
IP Rating	IP65

**Photometric Data** (Narrow Medium optic)

CCT	2200K	2700K	3000K	4000K
Rated Flux (lm delivered)	-	184	194	208
Efficacy (lm/W)	-	47	50	53
CRI (Ra)	-	90+	90+	90+

**Optical Data** (3000K)

Description	Narrow	Medium
Nominal FWHM	28	40
Peak Intensity (cd/lm)	877	427
UGR	TBC	TBC

**Lifetime & Compliance Data**

L70 / B10	50,000h
EMI	Compliant
RCM	Approved
Mercury Content	0mg

**Introduction**

VOY is a compact uplight with a deep recessed light source that delivers ultra-low glare uplighting to columns, walls and features.

With integral glare control and high-performance optics, VOY can achieve higher efficiencies and superior optical effects compared to the use of traditional honeycomb louvres.

Crafted from solid brass, the ARX range is 100% Australian made in Sydney.

Full IES files, LM-80 and compliance data is available from [arx.lighting](http://arx.lighting).

## PRELIMINARY DATASHEET



Years  
Warranty



Ingress  
Protection



Solvent  
Resistant



Saltwater  
Resistant




Observe  
Polarity




Lumen  
Maintenance

## Natural Brass, Waxed

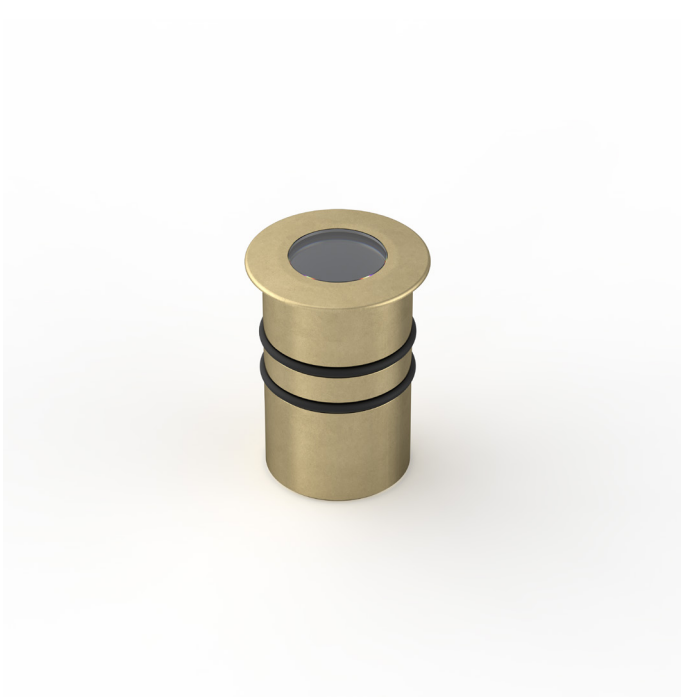

## Carbonite Aged, Waxed

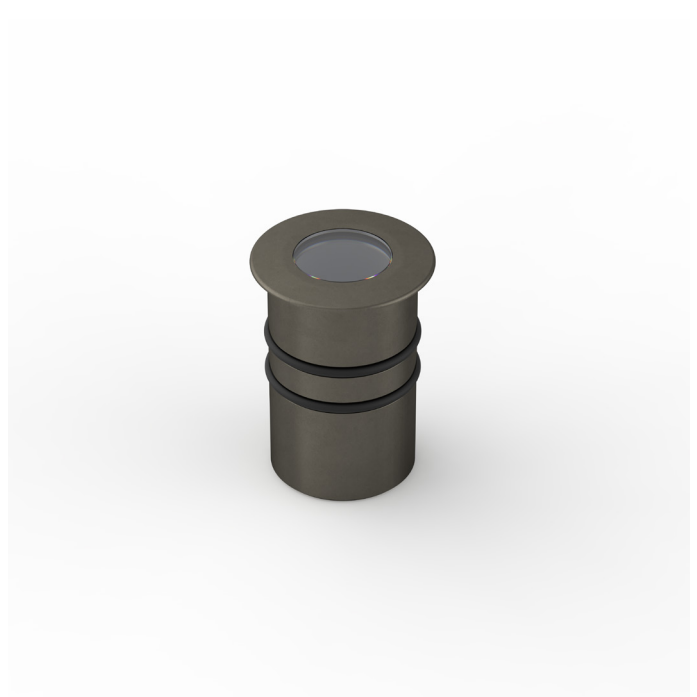

## Dimensions

