

LENA / ARX-535 Compact, shallow uplight





-		. .
Prod	uct	Data

Product Data							
Product Code	ARX-53	35					
Туре	Compact, shallow uplight						
Construction	CNC machined brass						
Warranty	10 Years						
Available Finishes	Aged Brass, Natural Brass, Brushed Copper, Electroless Nickle						
Electrical Data							
Input Voltage	24VDC						
Nominal Power	4W						
Dimming	Yes. 3-Wire PWM Signal dimming.						
Wiring	Parallel						
Mechanical & Thermal Data							
Overall Dimensions	60mm x 48mm						
Weight	0.505 kg						
Max Ambient Temperature	40°C						
IP Rating	IP65						
Photometric Data (Narrow Mediu	ım optic)						
CCT	2700K 300		000K	4000K			
Rated Flux (Im delivered)	288	303		324			
Efficacy (Im/W)	85	89		95			
CRI (Ra)	90+	S	0+	90+			
Optical Data (3000K)							
Description	Spot	Narrow Medium	Wide	Full Flood	ASYM		
Nominal FWHM	16	27	48	75	-		
Peak Intensity (cd/lm)	2989	1001	405	234	-		
UGR	-	-	-	-	-		
Lifetime & Compliance Data							
L70 / B10	50,000h						
EMI	Compliant						
RCM	Approved						
Mercury Content	Omg						

Introduction

LENA is a compact, shallow uplight with both symmetrical and wall wash optical options.

Crafted from solid brass, the ARX range is 100% Australian made in Sydney.

Full IES files, LM-80 and compliance data is available from <u>arx.lighting.</u>



arx.lighting has full product details and all available options, order code configuration & customised datasheets.



LENA / ARX-535

Dimensions and finish options

Aged Brass, Waxed



Brushed Copper




Natural Brass, Waxed



Electroless Nickle



Dimensions

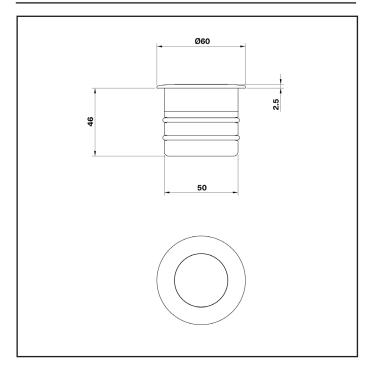

arx.lighting has full product details and all available options, order code configuration & customised datasheets.