


# JUNI DUO / ARX-862



Surface mount wall up/down light

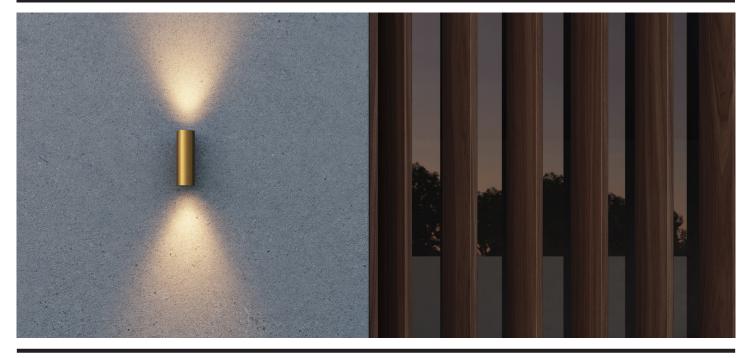

Product Code	ARX-862			
Туре	Surface mount wall up/down light			
Construction	CNC machined brass			
Warranty	10 Years			
Electrical Data				
nput Voltage	24VDC			
Nominal Power	16W (8+8)			
Dimming	Yes. 3-Wire PWM Signal dimming.			
Wiring	Parallel			
Mechanical & Thermal Data				
Overall Dimensions	60mm x 180mm x 85mm			
Weight	1.85 kg			
Max Ambient Temperature	40°C			
IP Rating	IP65			
Photometric Data (Medium opt	ic, 8W+8W)			
CCT	2200K	2700K	3000K	4000K
Rated Flux (Im delivered)	-	577+577	610+610	652+652
Efficacy (Im/W)	-	84	88	94
CRI (Ra)	-	90+	90+	90+
Optical Data (3000K)				
Description	Narrow Spot	Spot	Medium	Wide
Nominal FWHM	12	20	35	50
Peak Intensity (cd/lm)	6390	4067	1703	1003
UGR	-	-	-	-
Lifetime & Compliance Data				
L70 / B10	55,000h			
EMI	Compliant			
	Approved			
RCM	Approved			

### PRELIMINARY DATASHEET

**arx.lighting** has full product details and all available options, order code configuration & customised datasheets.

#### Introduction

JUNI DUO is an up/down, bi-directional fixed wall light available with low-glare optics, IP65 protection and a high-CRI light source.

Crafted from solid brass, the ARX range is 100% Australian made in Sydney.

Full IES files, LM-80 and compliance data is available from arx.lighting.



Lumen Maintenance

LM80



## JUNI WALL TWO / ARX-862

Dimensions and finish options


Natural Brass, Waxed

Carbonite Aged, Waxed





#### Dimensions

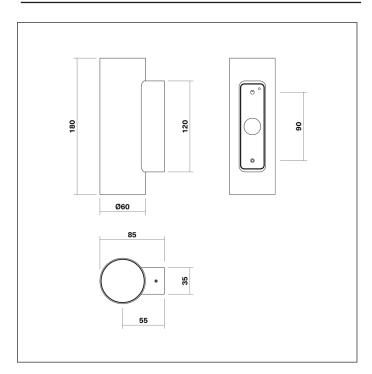

**arx.lighting** has full product details and all available options, order code configuration & customised datasheets.

All specifications subject to change. Copyright  $\textcircled{\sc opt}$  ARX Lighting / Telectran International.